



3/2 MICROVALVES
MANUALLY OPERATED
 using standard Ø 22 mm heads
 with instant fittings
 for tube Ø 4 mm O.D.

- **Simple, quick assembly on panels**
- **Wide choice of pilot operators**
- **Possibility of linking 2 NC functions using the same pilot operator**

CHARACTERISTICS


Fluids	air filtered, lubricated or not
Operating pressure	0 to 8 bar
Temperature	- 5°C to +60°C
Flow (Qv at 6 bar) (ANR)	112 l/min
Body	zamak
Exhaust	not connectable

YOUR SELECTION

description	type	action on module		colour	pneumatic module	code complete microvalve (1)		
		left-hand module	right-hand module					
NC - normally closed								
	flush push button	impulse-based			black	NC	30700017	
					green	NC	30700018	
					red	NC	30700019	
	mushroom button Ø 40	maintained (push-turn) impulse-based			red	NC	30700022	
					black	NC	30700020	
	switch	2 positions			black	NC	30700023	
	3 positions		0	not actuated	not actuated	black	NC+NC	30700027
			1	not actuated	actuated			
	3 positions self centering		0	not actuated	not actuated	black	NC+NC	30700028
			1	actuated	not actuated			

(1) a microvalve comprises of one or two pneumatic modules, an adapter and an operator

DIMENSIONS

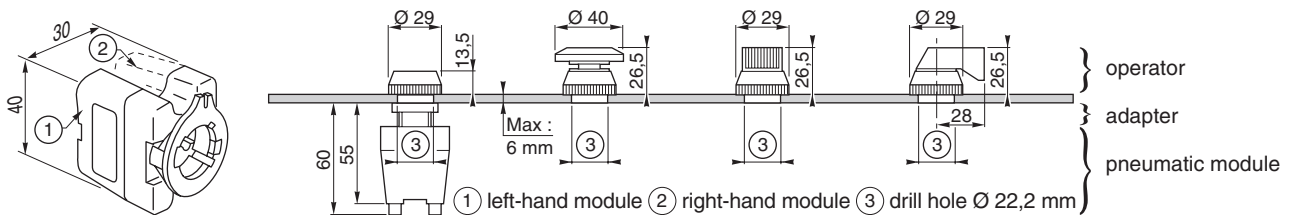

OPTIONS AND ACCESSORIES

Pin spanner for operator
 code : **88130729**