



3/2 MICROVALVES
MANUALLY OPERATED
 using standard Ø 22 mm heads
 with instant fittings
 for tube Ø 4 mm O.D.

CHARACTERISTICS

| | |
|--------------------------|---------------------------------|
| Fluids | air filtered, lubricated or not |
| Operating pressure | 0 to 8 bar |
| Temperature | - 5°C to +60°C |
| Flow (Qv at 6 bar) (ANR) | 112 l/min |
| Body | zamak |
| Exhaust | not connectable |


- **Simple, quick assembly on panels**
- **Wide choice of pilot operators**
- **Possibility of linking 2 NC functions using the same pilot operator**

YOUR SELECTION

| description | type | action on module | | colour | pneumatic module | code complete microvalve (1) | | |
|-----------------------------|----------------------------|---|-------------------|--------------|------------------|---------------------------------|-----------------|-----------------|
| | | left-hand module | right-hand module | | | | | |
| NC - normally closed | | | | | | | | |
| | flush push button | impulse-based | | | black | NC | 30700017 | |
| | | | | | green | NC | 30700018 | |
| | | | | | red | NC | 30700019 | |
| | mushroom button Ø 40 | maintained (push-turn) impulse-based | | | red | NC | 30700022 | |
| | | | | | black | NC | 30700020 | |
| | switch | 2 positions | | | black | NC | 30700023 | |
| | 3 positions | | 0 | not actuated | not actuated | black | NC+NC | 30700027 |
| | | | 1 | not actuated | actuated | | | |
| | 3 positions self centering | | 0 | not actuated | not actuated | black | NC+NC | 30700028 |
| | | | 1 | actuated | not actuated | | | |

(1) a microvalve comprises of one or two pneumatic modules, an adapter and an operator

DIMENSIONS

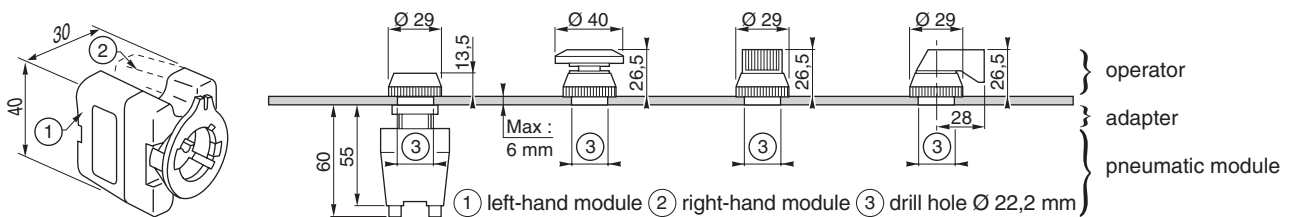

OPTIONS AND ACCESSORIES

Pin spanner for operator
 code : **88130729**